



شرکت ابزار طب
وارد کننده تجهیزات
آزمایشگاهی - تحقیقاتی - علمی
تاسیس ۱۳۶۳



تهران، خیابان مطهری، خیابان فجر، پلاک 38



021-88832100

021-88321727

021-88321728



www.abzarteb.com



[abzar.teb](https://www.instagram.com/abzar.teb)

OV5

Homogenizer

Versatile homogenizer ideal for dispersing, homogenizing and mixing



Convenient rotor-stator homogenizer

OV5 is the VELP solution for dispersing, homogenizing and mixing biological tissues, pharmaceutical products, cosmetics and food products. Wide selection of rotors and stators to match multiple applications.

- Stirring volume of up to 8 liters (water) as homogenizer
- Stirring volume of up to 40 liters (water) as high-speed mixer
- Handles fluids up to 10 000 mPa*s (cP)
- Speed variable from 10 000 to 30 000 rpm
- Shaft connects easily and quickly through a snap hook
- Rotor / stator configuration can be assembled in seconds
- Stainless steel shaft with PTFE seals
- Overload protection
- Smooth start and safety switch



تهران، خیابان مطهری، خیابان فجر، پلاک 38



021-88832100

021-88321727

021-88321728



www.abzarteb.com



abzar.teb



INSTRUMENT - CODE

OV5	230 V / 50 Hz	R20900010
OV5 - SYSTEM	230 V / 50 Hz	SA20900010

* Double Rod Mini H-Stand Set, VSS2CSR2 Dispersing tool included

CONFIGURE WITH ROTOR/STATOR

HOMOGENIZER



SHAFT



STATOR



ROTOR



TECHNICAL DATA

CONSTRUCTION MATERIAL	Technopolymer
STIRRING SPEED RPM	Graduated scale
POWER	500 W
POWER SUPPLY	230 V / 50Hz
WEIGHT	1,3 Kg
DIMENSION (WXHXD)	70x255x70 mm (2.7x10x2.7 in)
STIRRING SPEED	From 10000 to 30000 rpm
STIRRING VOLUME MAX (H2O)	Up to 8 litres as homogenizer
STIRRING VOLUME MAX (H2O)	Up to 40 litres as high speed mixer
MAX VISCOSITY (MPA X SEC)	10000

ROTOR/STATOR CONFIGURATIONS




تهران، خیابان مطهری، خیابان فجر، پلاک 38

021-88832100
021-88321727
021-88321728

www.abzar.teb.com

abzar.teb

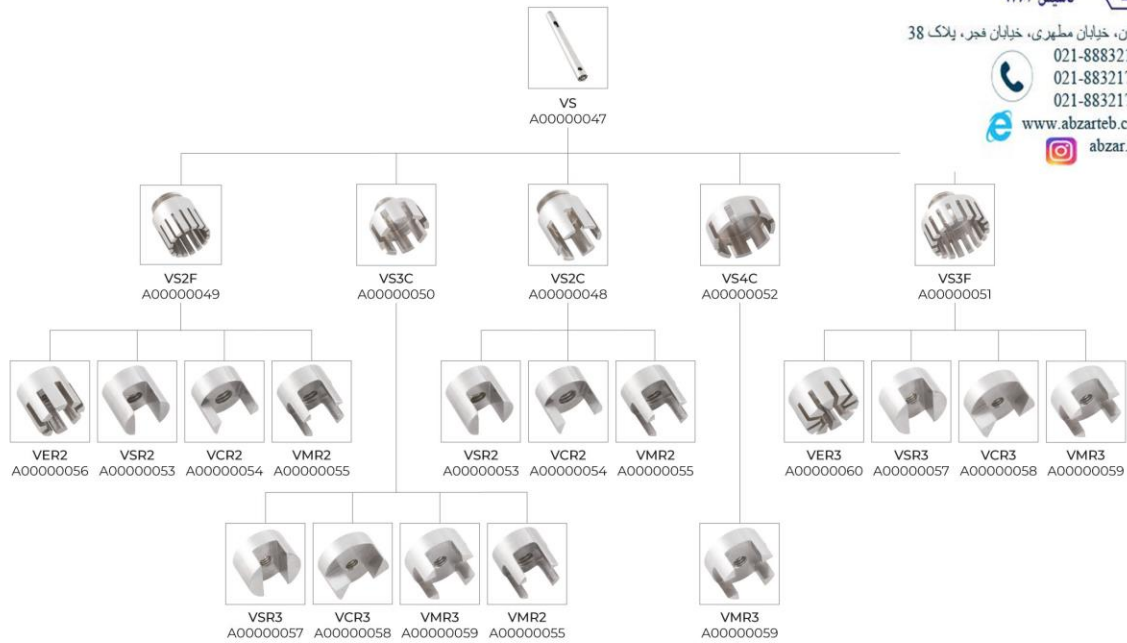

POSSIBLE COMBINATIONS

	Code No	Application field	Function	Treatable volume (water)	Max circum. speed	Ø Rotor	Ø Stator	Tool lenght	Min/max immersion depth	Ultimate fineness µm	Suspension emulsion	
*	VSS2CSR2	A00000026	CE, IF, PC, SI	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2CCR2	A00000027	CT, IA, M, SI	B	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2CMR2	A00000028	CE, VE	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
**	VSS2FER2	A00000029	CT, IF, SI, VE	C	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-50	1-10
	VSS2FCR2	A00000031	BT, CT, IA, IT, M, SI	B	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-150	1-10
	VSS2FMR2	A00000032	CE, CT, IA, IC, PC, VE	A	100-5000	22,7	15 mm	20 mm	220 mm	40/175 mm	10-150	1-10
**	VSS3CSR3	A00000033	CT, IA, IF, M, SI	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CCR3	A00000034	CT, IA, IF, M, SI	B	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CMR3	A00000035	CE, VE	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3CMR2	A00000036	CE, IA, SI	D	250-2000	34,9	15 mm	30 mm	220 mm	40/175 mm	High speed mixer	
**	VSS3FER3	A00000037	CT, IF, SI, VE	C	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3FSR3	A00000038	CT, IF, SI, VE	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
	VSS3FMR3	A00000040	CE, IA, IC, IF, IT	A	100-8000	34,9	23 mm	30 mm	220 mm	40/175 mm	5-25	1-5
**	VSS4CMR3	A00000041	CE, IA, SI	D	1000-4000	34,9	23 mm	40 mm	220 mm	40/175 mm	High speed mixer	
**	VSS5CSR4	A00000046	BT, M	A	0,2-50	6,3	4 mm	5 mm	128 mm	10/60 mm	10-50	1-10

* Most used model

** The dispersing tool works with Ø 4 mm rotor and Ø 5 mm stator for microbiological applications (e.g. suitable for Eppendorf, cuvettes, etc.)

*** BT = biotechnology, CE = ceramic industry, CT = paper & tissue industry, IA = food industry, IC = cosmetic industry, IF = pharmaceutical industry, IT = tobacco industry, M = medicine,

PC = petrochemistry industry, SI = sewage pollution control, VE = paint industry

**** A = dispersing tool for solid/liquid media, B = dispersing tool with blades for fibrous/stringy materials, C = dispersing tool for water/oil or oil/water emulsions, D = stirring shaft



We reserve the right to make technical alterations
We do not assume liability for errors in printing, typing or transmission

Rev: 3.01.2022

VELP Official Partner

DESIGNED AND MANUFACTURED IN ITALY



ITALY - HQ
Via Stazione 16
20865 Usmate (MB) Italy
Tel. +39 039 628811
velp@italy@velp.com

INDIA
velpindia@velp.com

USA
155 Keyland Court, Bohemia
NY 11716 - U.S.
Tel. +1 631 573 6002
velpusa@velp.com

CHINA
Xinlong Rd Building 28, Lane 1333
Shanghai city - China
Tel. +86 18017557329
velpchina@velp.com